


# STEEL DRUM DRAWING

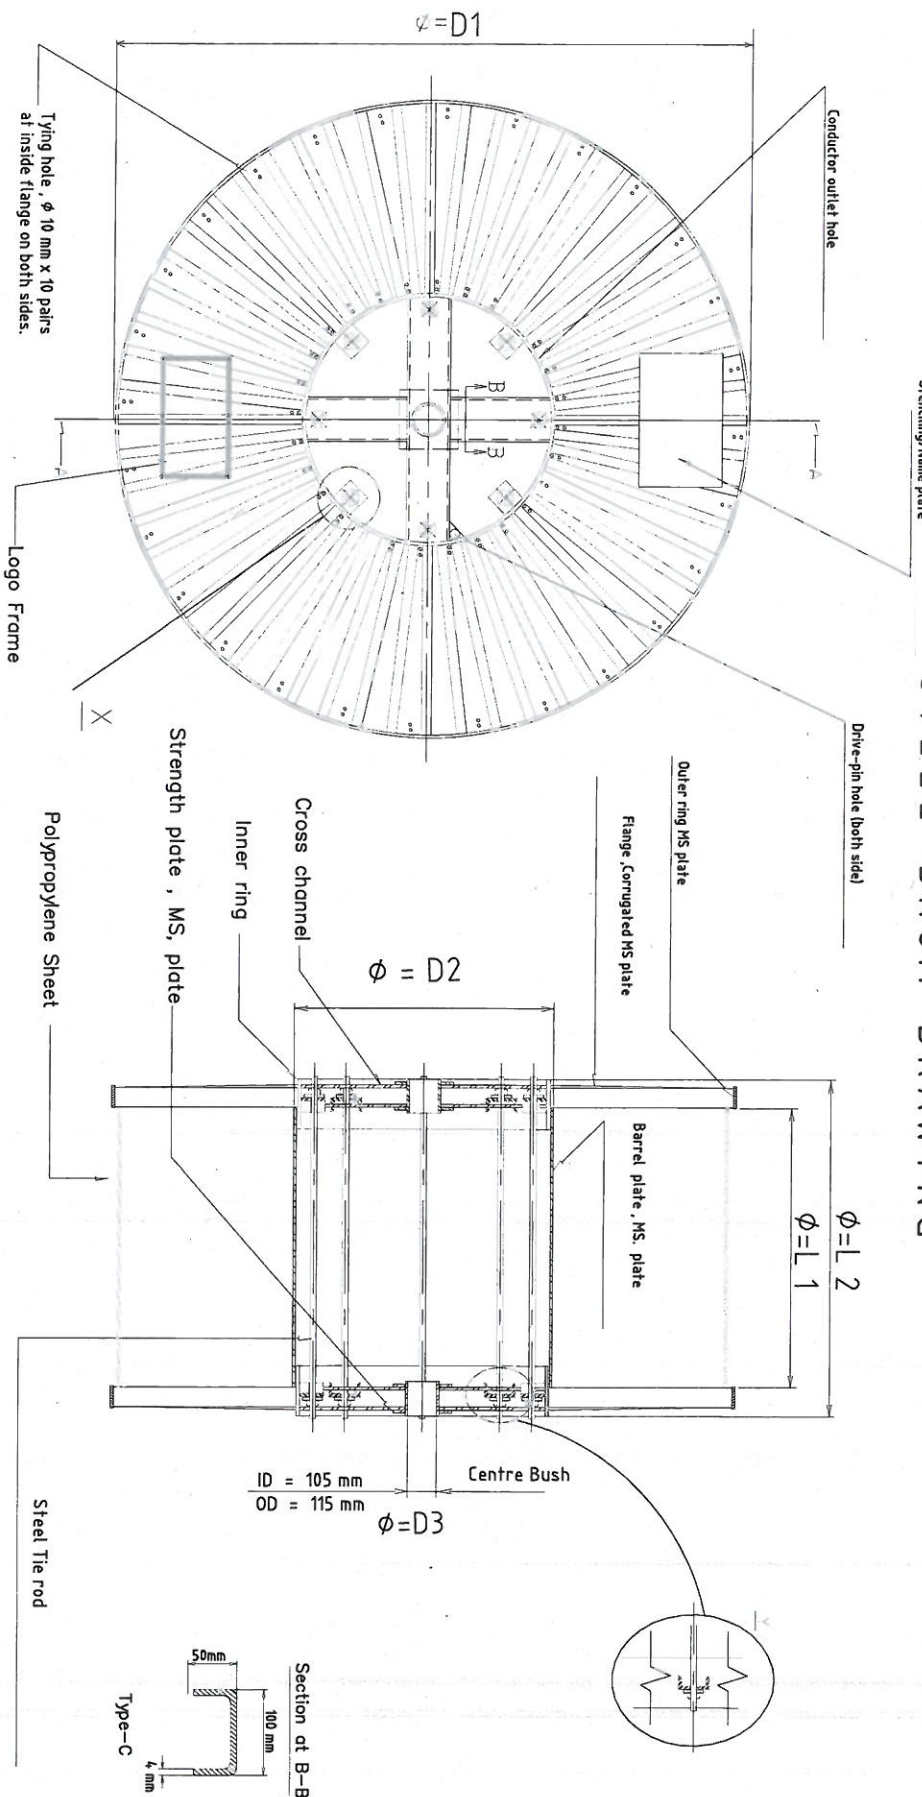

N	D1	D2	D3	L1	L2
M	1800	650	105	840	1040 Approx.

- 1) OUTER LAYER OF THE CONDUCTOR SHALL BE PROTECTED WITH ADEQUATE PROTECTION.
- 2) INNER SURFACE OF FLANGE AND BARREL SHALL BE PROTECTED WITH PPE SOLID SHEET.
- 3) WEIGHT CARRYING CAPACITY OF DRUM WITH CONDUCTOR IS APPROXIMATELY 5000 KG.

P	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17
---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

<b>TITLE:</b> STEEL DRUM FOR CONDUCTORS		<b>DRAWN BY:</b> Sudhir Gulaikar	
<b>LENGTH:</b>		<b>CHECKED BY:</b> Parvula Charde	
<b>PROJECT:</b>		<b>SIGN:</b>	
<b>CLIENT:</b>		<b>APPROVED BY:</b> Customer	
<b>STERILITE POWER TRANSMISSION LIMITED</b> Survey No: 99, Madhuban Dam Road, Village Ralhoth, P.O.Box No. 396230, Sivrasa, India Tel: (+91) 0260 6612239 www.sterilitepower.com		<b>REVIEWED BY:</b> Ajay Parmar / Prabhakar Jain	
<b>DRAWING NO:</b> SPTL/20-27/004 Rev 00		<b>DATE:</b> 29.06.2020	
<b>PAGE:</b> 1 / 1		<b>SCALE:</b> NTS	