


∅25, MAX LOAD 100 kN

L mm	Marking
500	F1280250500
1000	F1280251000
1500	F1280251500
2000	F1280252000
2500	F1280252500
3000	F1280253000
3500	F1280253500
4000	F1280254000
4500	F1280254500

∅32, MAX LOAD 165 kN

L mm	Marking
500	F1280320500
1000	F1280321000
1500	F1280321500
2000	F1280322000
2500	F1280322500
3000	F1280323000
3500	F1280323500
4000	F1280324000
4500	F1280324500

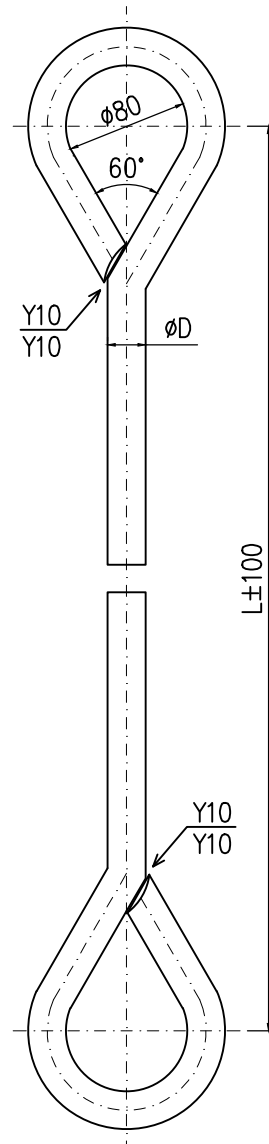

MATERIAL: S355J2 (EN 10025)
 HOT DIP GALVANIZING: SFS-EN ISO 1461, CLASS B
 WELDING: EN 5817 cl. C

Designed	Drawn	Inspected	Appr.	Scale 1:5	Replaces	Sheet 1/(1)
 Double eye rod					Section	Date 8.1.2016
					Drawing number - revision NE-F-1301	